

# **WD-400 Series**

Non-motorized Backdraft Damper Horizontal or Vertical Mount (Intake)

### **Application**

The WD-400 series are a non-motorized backdraft damper which may be mounted either vertically for intake air or mounted horizontally to allow vertical airflow down and prevent reverse airflow. The dampers are opened by air pressure differential and closed by springs. Optional motor packs are not available.

## **Ratings**

Pressure

Up to 2.0 in. wg (0.5 kPa)

**Velocity** 

Up to 2,500 fpm (13 m/s)

**Temperature** 

Up to 180°F (82°C)

### Construction

	Standard	
Frame Material	Galvanized steel	
Frame Thickness	18 ga. (1.3mm)	
	No flange (WD-400 & 410)	
Frame Type	Flange on intake (WD-430)	
	Flange on discharge (WD-420)	
Blade Material	Roll formed aluminum	
Blade Thickness	0.025 in. (0.64mm)	
Blade Seals	Vinyl	
Axle	³⅓₅ in. (4.8mm) dia. zinc plated steel	
Axle Bearings	Synthetic	
Linkage Material	Galvanized steel	


## **Size Limitations**

Minimum	Maximum Size			
Size	Single Panel	Multiple Panels		
All 400 series	All 400 series	WD-400, 410		
8 x 8	31 x 74	150 x 148		
203 x 203	787 x 1880	3810 x 3759		
		WD-420, 430		
	148 x 148			
		3759 x 3759		
	All 400 series 8 x 8	Size         Single Panel           All 400 series         All 400 series           8 x 8         31 x 74		




 $^{\star}$  W & H dimensions of each section are furnished approximately  $1\!\!/_{\! 8}$  in. (3mm) under size.

### **Horizontal Mount**



#### **Vertical Mount**



#### **Performance Data**

### **Pressure Drop**

Performance data results from testing a 24 in. x 24 in. (610mm x 610mm) damper in accordance with AMCA Standard 500-D using Figure 5.5 for the WD-400 and Figure 5.7F for the WD-410. All data has been corrected to represent standard air at 0.075 lb/ft<sup>3</sup> (1.201 kg/m<sup>3</sup>).

WD-400


Operational	ΔP	Velocity	
Data	in. wg (Pa)	fpm (m/s)	
Blades Start to Open	0.006 (1.50)	5.9 (0.03)	
Blades Fully	0.287	1250	
Open	(71.49)	(6.35)	

#### **Pressure Drop**

24 in. x 24 in. (610mm x 610mm) Damper

100

Velocity (fpm)




WD-410

Operational	ΔP	Velocity
Data	in. wg (Pa)	fpm (m/s)
Blades Start	0.027	19.47
Open	(6.73)	(0.10)
Blades Fully	0.405	1500
Open	(100.88)	(7.62)

#### **Pressure Drop**

24 in. x 24 in. (610mmx 610mm) Damper

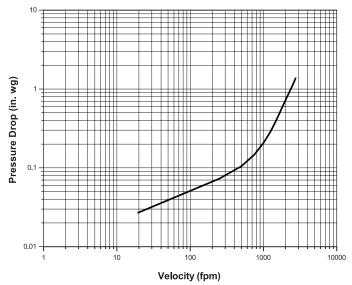

### Leakage


0.001

Pressure Drop (in. wg)

Leakage testing was conducted in accordance with AMCA Standard 500-D and is expressed as cfm/ft<sup>2</sup> of damper face area. All data has been corrected to represent standard air at 0.075 lb/ft<sup>3</sup> (1.201 kg/m<sup>3</sup>).

#### Leakage

24 in. x 24 in. (610mm x 610mm) Damper



### WD-400/410 Selection

- Multiple section dampers shown below are supplied as equal size sections. Any damper that has multiple sections, both vertically and horizontally, will require field assembly and will require additional reinforcement (not supplied by factory) to support the assembly. These larger dampers must have the additional reinforcement to give them structural stability.
- Please note that the width dimension is always taken as being parallel to the length of the blades.

					Width		
	8				4 10		
0		8 Up To 32	32 Up Thru 50	Above 50 Up To 64	64 Up Thru 100	Above 100 Up To 128	128 Up To 150
8	8 Up To 74	Single Panel One Section	Double Panel One Section	Single Panel Two Section	Double Panel Two Section	Single Panel Four Section	Double Panel Three Section
Height	74 Up To 148	Single Panel Two Section	Double Panel Two Section	Single Panel Four Section	Double Panel Four Section	Single Panel Eight Section	Double Panel Six Section
148		Note: A 26 in × 26	Sin and a 20 i	n v 20 in 1	WD-410 will be supplied as a	Double Banel, One	Section damper

Note: A 26 in. x 26 in. and a 30 in. x 30 in. WD-410 will be supplied as a Double Panel, One Section damper.

\*Width and height given in inches.

## WD-420/430 Selection

- Multiple section dampers shown below are supplied as equal size sections. Any damper that has multiple sections, both vertically and horizontally, will require field assembly and will require additional reinforcement (not supplied by factory) to support the assembly. These larger dampers must have the additional reinforcement to give them structural stability.
- Please note that the width dimension is always taken as being parallel to the length of the blades.

					/idth	
	8	3				28 148
8		8 Up To 32	32 Up To 64	64 Up Thru 74	Above 74 Up To 128	128 Up To 148
	8 Up Thru 74	Single Panel One Section	Double Panel One Section	Triple Panel One Section	Double Panel Two Section	Double Panel Three Section
Height 148	Above 74 Thru 148	Single Panel Two Section	Double Panel Two Section	Triple Panel Two Section	Double Panel Four Section	Double Panel Six Section

<sup>\*</sup>Width and height given in inches.



**CATALOG** 



DAMPER SELECTION
GUIDE



**SPECIFICATIONS** 



**WARRANTY**