

Application

The SEBR-30 series is an eccentrically pivoted backdraft damper for low velocity systems. SEBR-30 series is a vertical mounted damper and designed to allow horizontal airflow and prevent reverse airflow. On-blade counterweights are provided to fine tune start-to-open and full open blade operation. Ball bearings minimize friction.

Recommended Applications

- Gravity hood intake and exhaust
- Stairwell pressurization
- Room pressurization
- Ductwork outlets

Poor Applications

- Propeller fan outlets (high velocity)
- Centrifugal fan outlets (high velocity)
- Building pressurization (sensitive to wind)
- Pressure relief exceeding 0.3 in. wg (0.075 kPa)

Ratings

Back Pressure

2.0 in. wg (0.5 kPa)

Start-to-Open Pressure

0.05 in. wg (.01 kPa)

Velocity

2,000 fpm (10.2 m/s)

Temperature

180°F (82°C)

Construction


	Standard	Optional
Frame Material	316SS	-
Frame Thickness	16 ga. (1.5 mm)	-
Frame Type	No Flange (SEBR-30)	-
	Flange on Discharge (SEBR-31)	-
	Flange on Intake (SEBR-32)	-
Blade Material	316SS	-
Blade Seal	TPE	None
Blade Thickness	20 ga. (1 mm)	-
Axle	5/8 in. (9.5mm) sq. 316SS	-
Axle Bearings	316SS with acetal races	-
Linkage Material	316SS	-
Jamb Seal	None	EPDM
Counterbalance	Blade mounted with adjustable 316SS weights	-

Feature

- Selectable start open from .05 to .30 in. wg (0.012 kPa - 0.075 kPa).




*W & H dimensions furnished approximately 1/4 in. (6 mm) undersize.

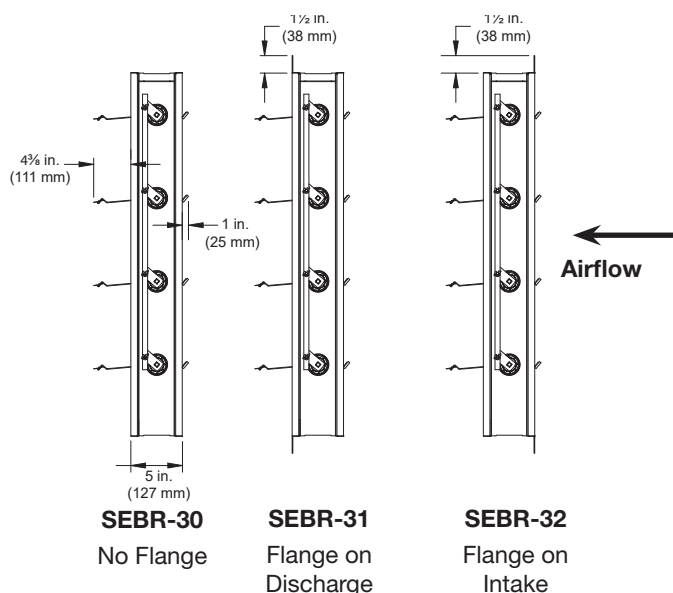

Size Limitations

W x H	Minimum Size	Maximum Size	
		Single Section	Multiple Sections
Inches	8 x 6	48 x 74	96 x 148
mm	203 x 152	1220 x 1880	2438 x 3759





Performance Data

SEBR-30 Series Barometric Relief Dampers

Performance data results from testing a 12 in. x 12 in. and 36 in. x 36 in. (305 mm x 305 mm and 914 mm x 914 mm) in accordance with AMCA Standard 500-D using Figure 5.3 (fully ducted), 5.2 (ducted exhausting into an open area), and 5.5 (plenum mounted). All data has been corrected to represent standard air density at 0.075 lb/ft³ (1.201 kg/m³).

Pressure drop data shown is based on minimum start open pressure. Higher start open pressure will result in different pressure drop.

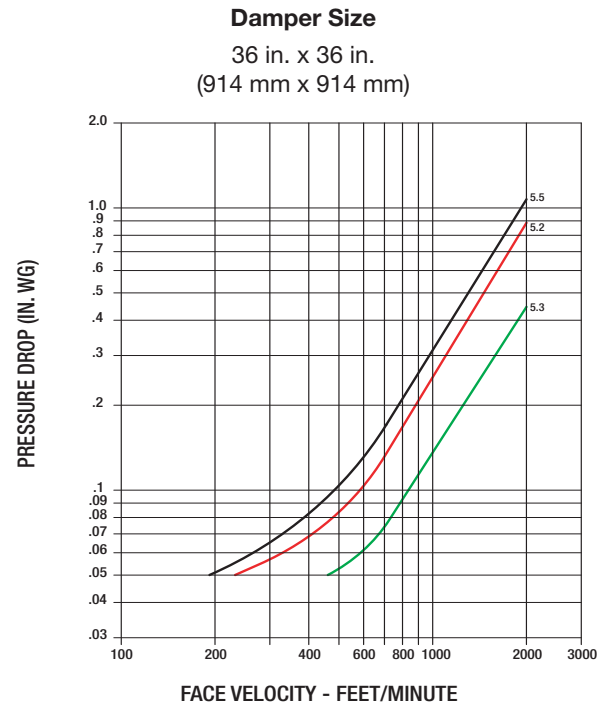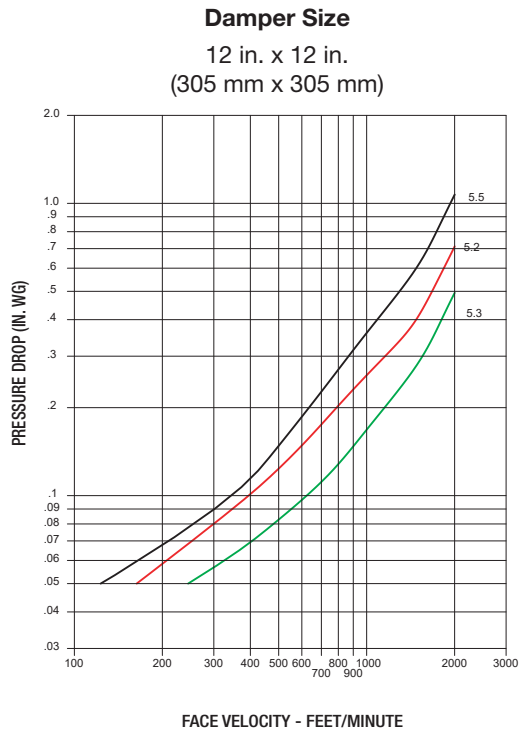

Document Links



[INSTALLATION](#)



[CATALOG](#)



[SELECTION GUIDE](#)



[SPECIFICATIONS](#)



[WARRANTY](#)



P.O. Box 410 • Schofield, WI 54476-0410 • 715.359.6171 • greenheck.com

Copyright © 2026 Greenheck Fan Corporation
SEBR-30 Series, R12, March 2026
Greenheck Fan Corporation reserves the right to make
product changes without notice